


PARTS LIST

Questions, problems, missing parts? Before returning the product to your retailer, call our customer service department toll free at 1-866-820-5805, 9 a.m. - 5 p.m., EST, Monday - Friday. You may also contact us at customerservice@libertygardenproducts.com

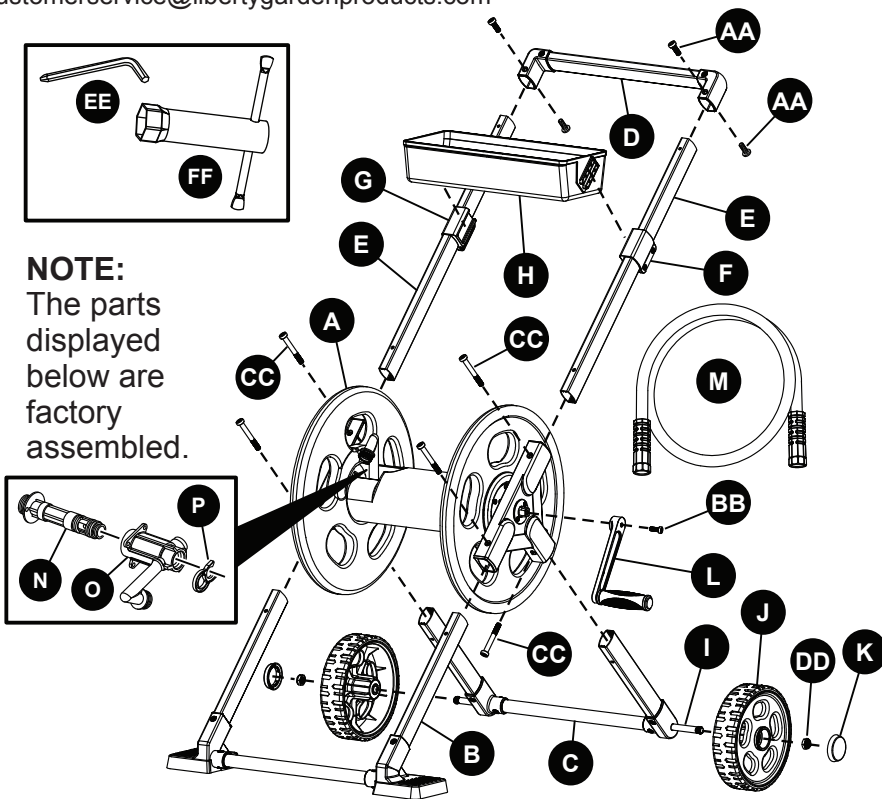

MODEL # 304 PARTS LIST			
ITEM	DESCRIPTION	PART #	QTY
AA	Screw (M6 x 10 mm)	304-1	4
BB	Allen Screw (M6 x 16 mm)	304-2	1
CC	Screw (M6 x 58-12 mm)	304-3	6
DD	M12 x 8 Axle Nut	304-4	2
EE	4 mm Allen Wrench	304-5	1
FF	19 x 80 mm Socket Wrench	304-6	2
A	Spool Assembly	304-7	1
B	Front Support Feet	304-8	1
C	Back Support Feet	304-9	1
D	Top Push Handle	304-10	1
E	Push Handle	304-11	2
F	Basket Bracket, Left	304-12	1
G	Basket Bracket, Right	304-13	1
H	Basket	304-14	1
I	Axle	304-15	1
J	Tire	304-16	2
K	Dust Cap	304-17	2
L	Crank Handle	304-18	1
M	Leader Hose	304-19	1
N	* Supply Tube	304-20	1
O	* Exit Tube	304-21	1
P	* Locking Clip	304-22	1

NOTE: * Indicates factory assembled parts

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

- READ ALL INSTRUCTIONS CAREFULLY AND BE SURE THEY ARE FULLY UNDERSTOOD BEFORE USING THE HOSE CART.**
- DO NOT** load more than 250 feet (76.2 m) of hose onto the cart. Distribute the hose evenly over the surface of the drum assembly.
- DO NOT** exceed maximum water pressure of 125 PSI.
- DO NOT** expose the unit to freezing temperatures while water remains in the plumbing system. Freezing temperatures can crack the exit tube causing damage to the unit. Drain water from the hose cart and store indoors during freezing temperatures.
- DO NOT** leave water running through the hose cart while not in use or unsupervised.
- DO NOT** consume water from garden hose, it is not rated for human consumption.
- Turn off water source when not in use. Do not leave hose pressurized when not in use.
- If any parts become damaged, broken, or misplaced, do not use the hose cart until the parts have been repaired or replaced.

DO NOT use the hose cart on surfaces that can cause damage to the wheels.

It is recommended that the hose cart be inspected for damage before each use.

KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.

SAFETY INFORMATION (continued)



WARNING

This product contains one or more chemicals known in the state of California to cause cancer and birth defects or reproductive harm.
Wash hands after handling.

LIBERTY GARDEN PRODUCTS LIMITED WARRANTY

(Effective September 03, 2024)
This limited warranty is applicable to each original end-customer (hereinafter “Customer”) purchasing the model Explorer 304 two-wheel hose cart consisting of the structural metal frame and spool (hereinafter the “Structural Frame”) and various other non-frame components (hereinafter the “Non-Frame Parts”) sold by Liberty Garden Products, Inc. (hereinafter “Company”) for Customer’s own use and not for resale. The Structural Frame and Non-Frame Parts are collectively referred to herein as the “Products”.

For additional details of the Liberty Garden Products Limited Warranty, scan the QR code below.



Liberty Garden Products
Updated 08/28/2024



© 2024 Liberty Garden Products, Inc. All Rights Reserved, Kernersville, NC




**Liberty Garden
Products**

"Liberty Garden" is a
registered trademark of
Liberty Garden Products, Inc.

EXPLORER.™

Two-Wheel Hose Cart Owner's Manual

MODEL #304

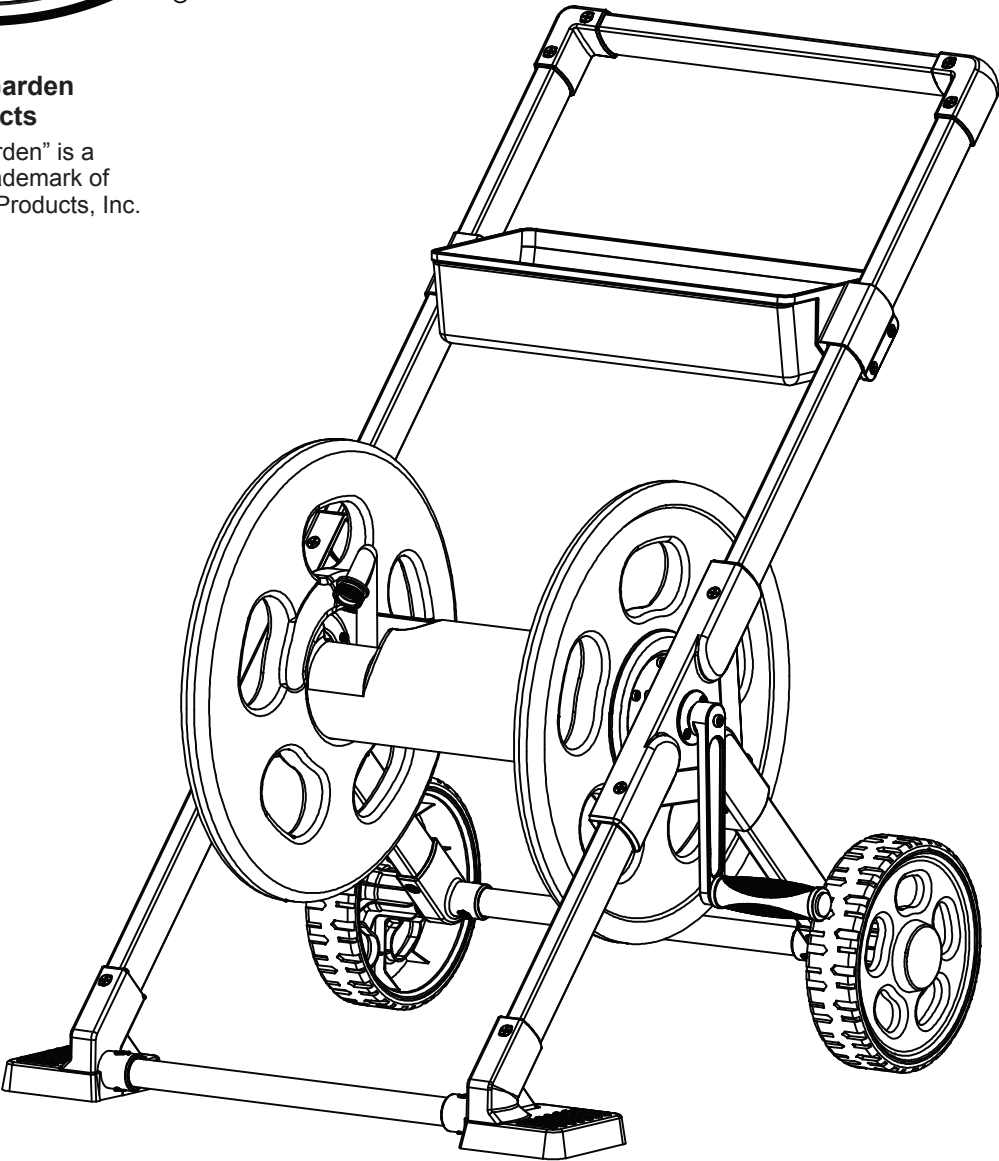

**SCAN QR CODE FOR
ASSEMBLY VIDEO**

LIBERTY GARDEN PRODUCTS, INC.


1161 SOUTH PARK DRIVE, KERNERSVILLE NC 27284

WWW.LIBERTYGARDENPRODUCTS.COM

HARDWARE CONTENTS AND REQUIRED TOOLS

The hardware displayed below is included with the product.

NOTE: (Drawings are not to scale)

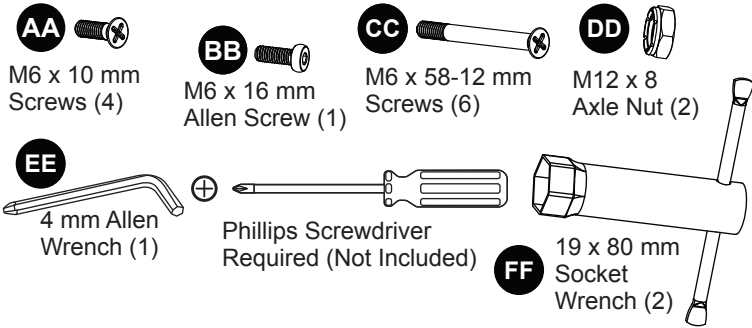

PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, **Do Not** attempt to assemble the product.

Estimated Assembly Time: 10 minutes (Not including connecting the leader hose).

ASSEMBLY INSTRUCTIONS

1


BB x1 Protective Cap

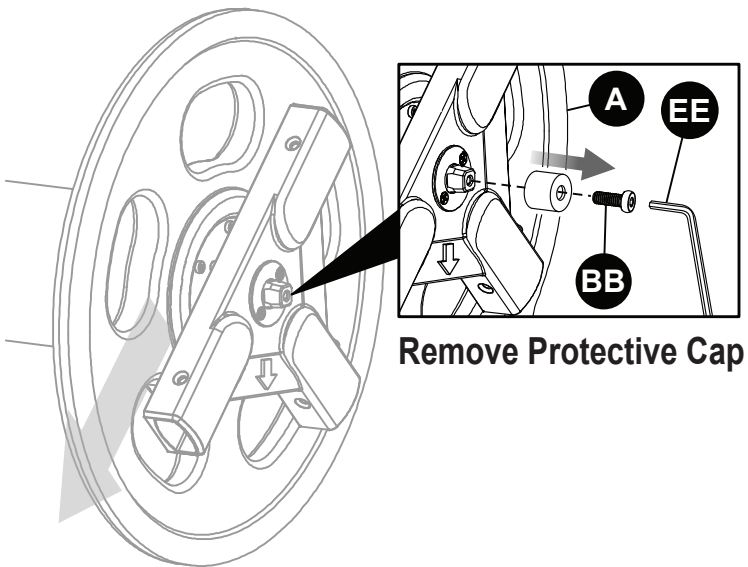

2

BB x1

NOTE: DO NOT overtighten the Allen screw.

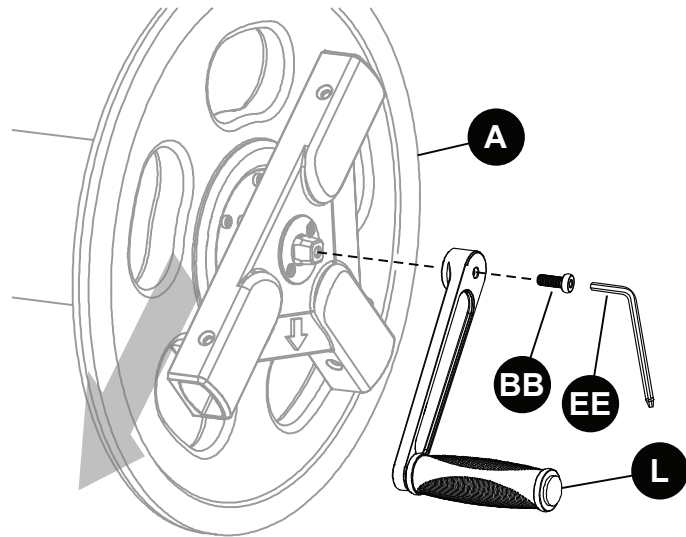


3

4


5

DD x2

NOTE: Do not install any fasteners for support feet until Step 10.

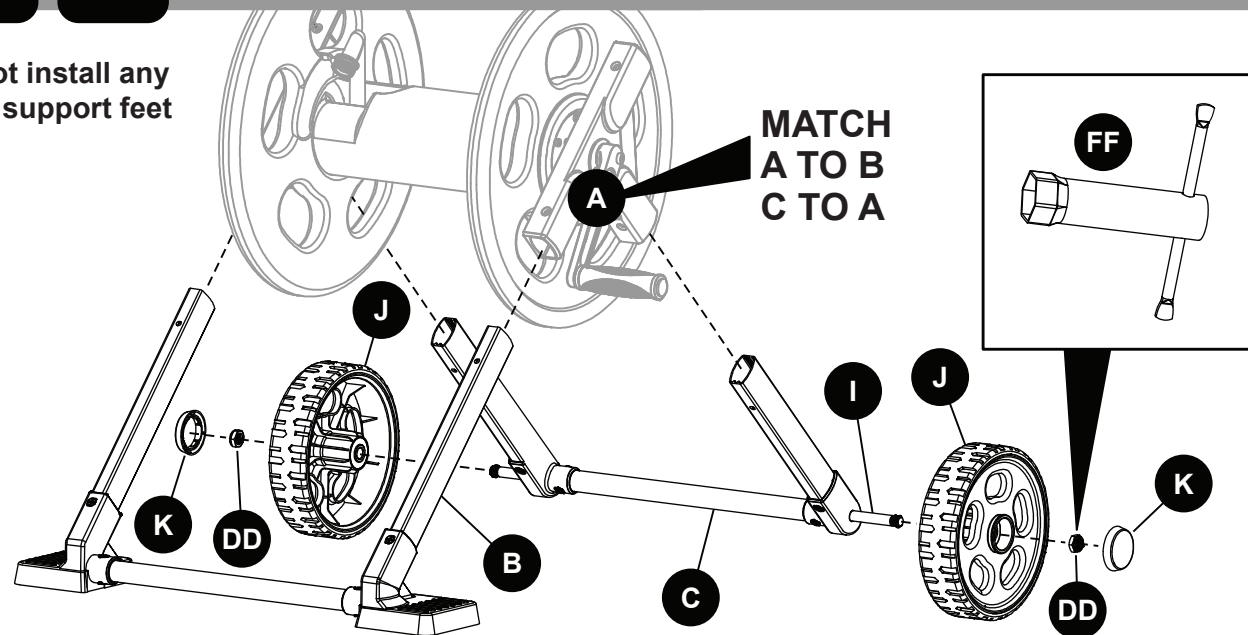


6

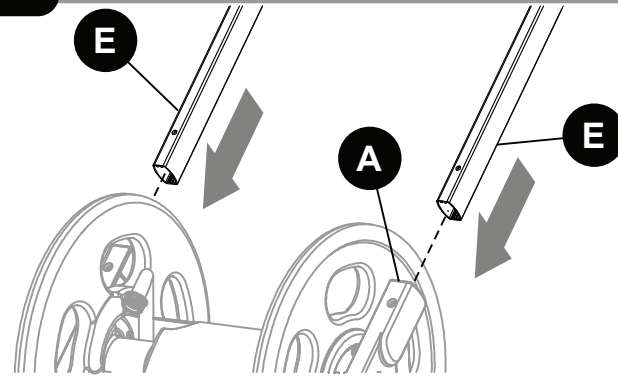


7

8

NOTE: Attach basket brackets before handle.

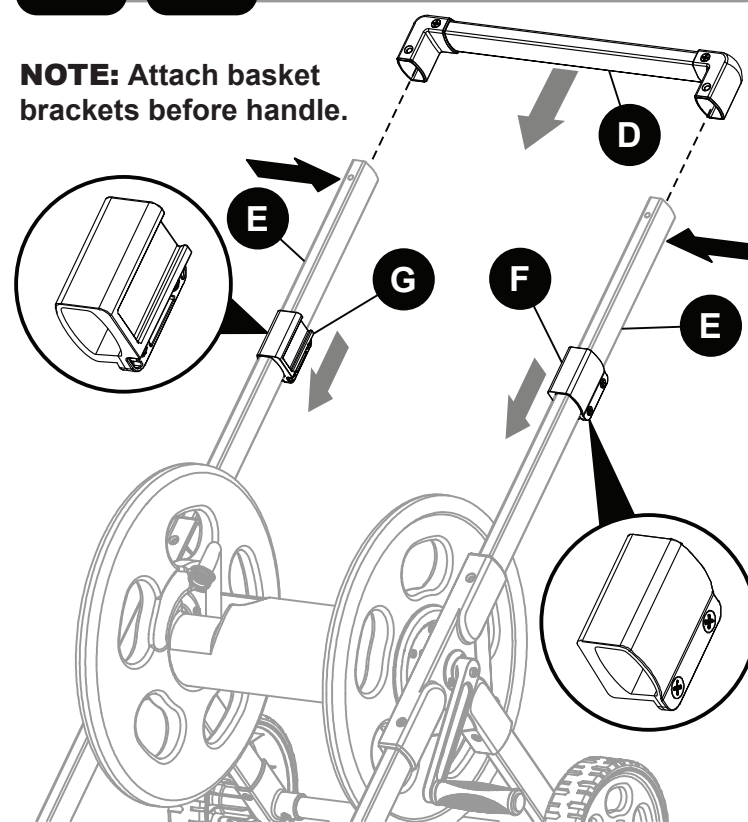


9

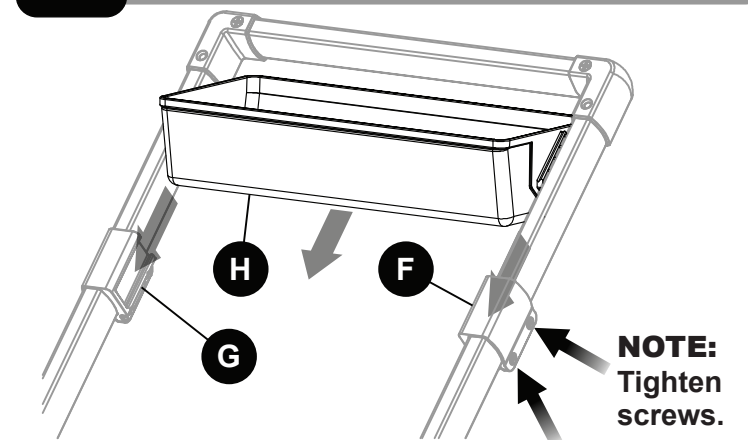

10

AA x4 **CC** x6

NOTE: ALL SCREWS MUST BE TIGHTENED BY HAND BEFORE USING THE SCREW DRIVER.

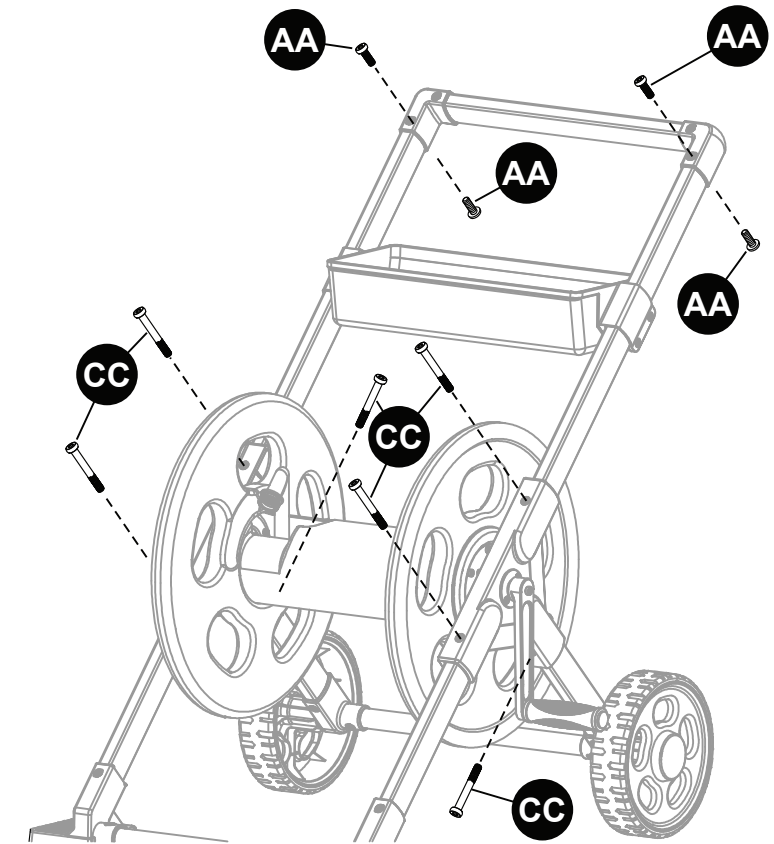

11

NOTE: Leader hose (M) attaches to supply tube and outdoor spigot.

