


Replacing Swivel on Wall Mounted Hose Reels

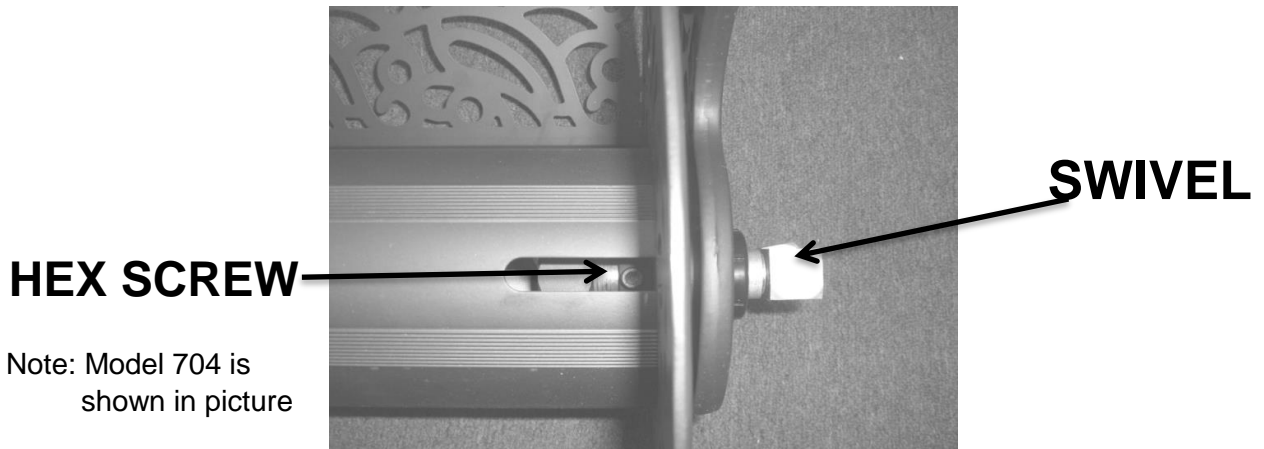

We recommend removing the old swivel before ordering a new one in case there is internal corrosion. Spray some penetrating oil internally to help remove any corrosion.

TOOLS REQUIRED:

ALLEN WRENCH OR HEX SCREWDRIVER
PLIERS

- 1 Locate the opening in the hose reel spool revealing the HEX SCREW.
- 2 Use an Allen Wrench or Hex Screwdriver to **loosen** the HEX SCREW.
- 3 Use PLIERS to unscrew the swivel from the elbow connector inside of the drum. **DO NOT HOLD THE SQUARE SWIVEL HEAD** as it is designed to turn. Hold the swivel shaft stationary and turn the reel with your right hand to unthread the swivel.
- 4 Remove old SWIVEL and tightly install the replacement SWIVEL. Make sure there is plumber's tape on the male threads of the swivel before installing.
- 5 Tighten HEX SCREW.
- 6 Re-attach leader hose to the new swivel and check for leakage.

Please call or email our Customer Service Department if you have any questions.

We are here to serve you Monday through Friday - 9 am to 5 pm EST

[Call 1-866-820-5805](tel:1-866-820-5805) or email customerservice@libertygardenproducts.com

Visit our website to see our complete offering of quality water hose storage products

www.libertygardenproducts.com